


Wall mounted unit

FTXC-B + RXC-B



sensira

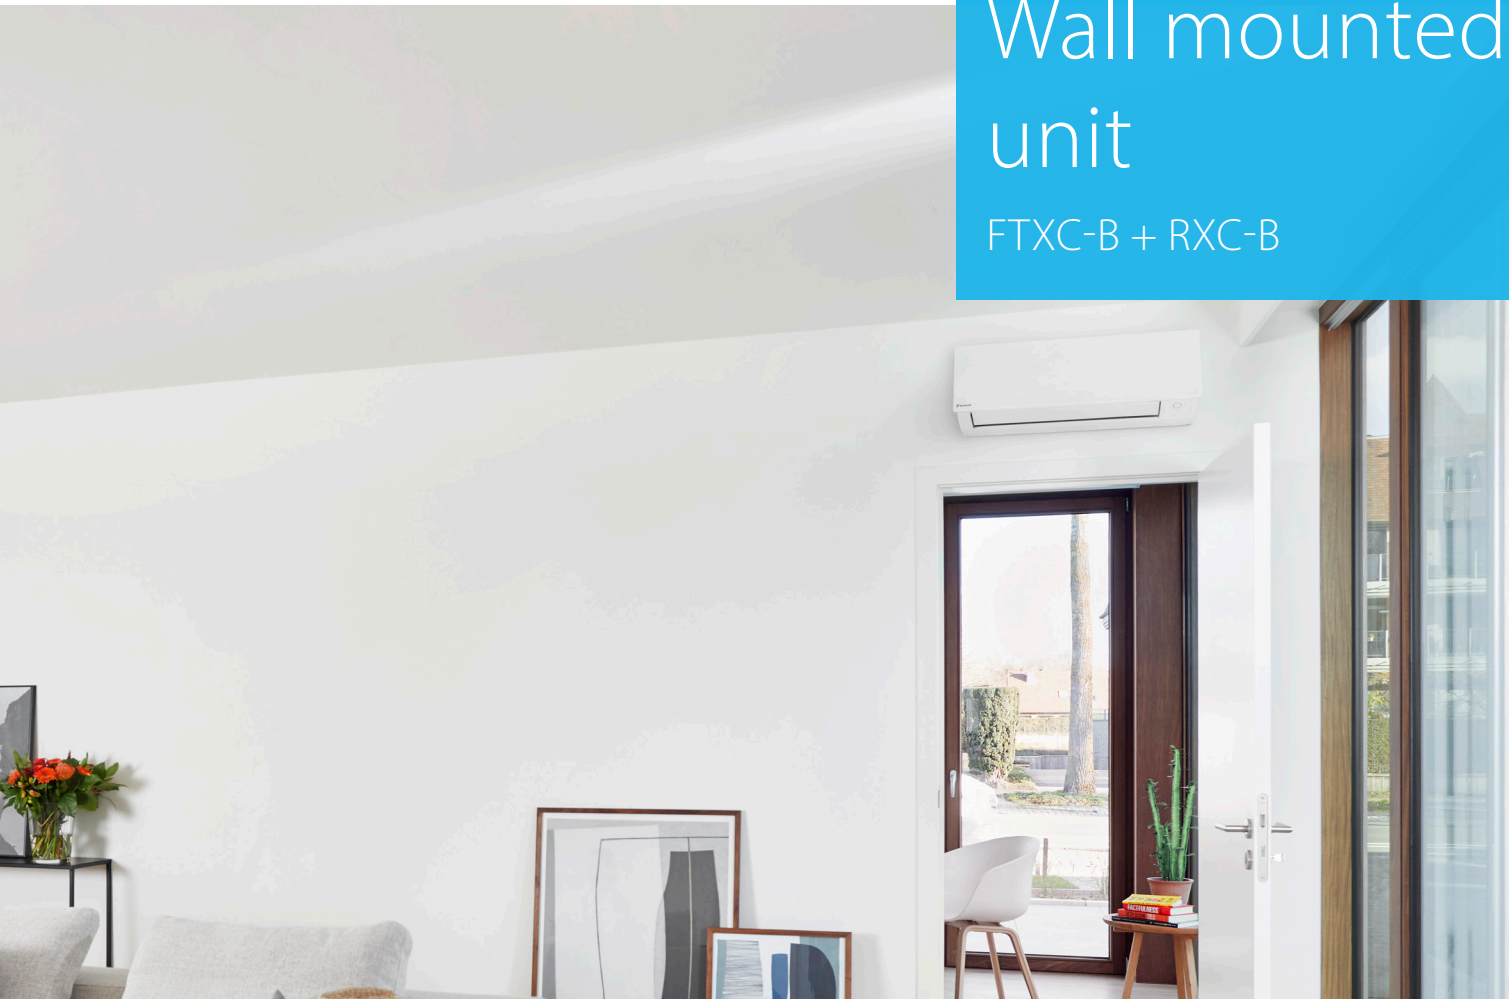

Energy saving during standby mode




Online controller via app

Wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Seasonal efficiency values up to A++ in cooling
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency

FTXC-B + RXC-B

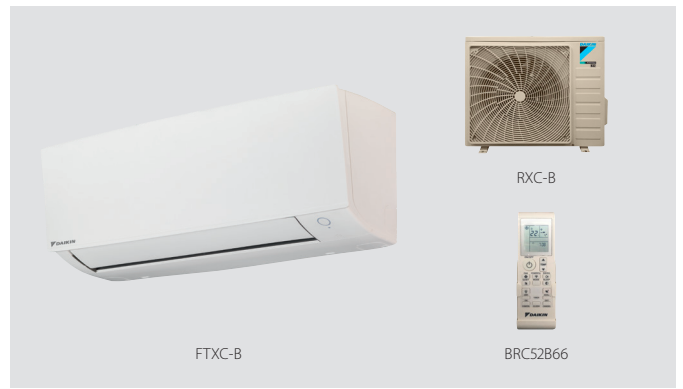


Efficiency data		FTXC + RXC	20B + 20B	25B + 25B	35B + 35B	50B + 50B	60B + 60B	71B + 71B
Cooling capacity	Min./Max.	kW	1.3/3.0		1.3/4.0	1.4/6.2	1.8/7.0	2.3/7.3
Heating capacity	Min./Max.	kW	1.30/4.00		1.30/4.80	1.36/6.60	1.48/8.00	2.30/9.00
Power input	Cooling	Min./Nom./Max.	0.30/0.595/1.15	0.30/0.765/1.15	0.32/1.05/1.74	0.30/1.55/2.11	0.38/1.89/2.05	0.44/2.38/2.54
	Heating	Min./Nom./Max.	0.28/0.670/1.35	0.28/0.750/1.35	0.28/1.07/1.57	0.27/1.52/1.85	0.33/1.68/2.35	0.50/2.46/2.74
Space cooling	Energy efficiency class		A++					A
	Capacity	Pdesign	2.08	2.57	3.44	5.08	6.21	6.96
	SEER		6.89	6.84	6.87	6.45	6.40	5.30
Annual energy consumption		kWh/a	106	132	175	276	340	459
Space heating (Average climate)	Energy efficiency class		A+					A
	Capacity	Pdesign	1.87	2.23	2.24	3.90	4.10	6.35
	SCOP/A		4.40	4.45	4.28	4.42	4.24	3.81
	Annual energy consumption		kWh/a	594	700	732	1,236	1,354
Nominal efficiency	EER		3.36	3.35	3.29	3.30	2.98	
	COP		3.73	3.79	3.74	3.71	3.81	3.25
Energy labeling Directive		Cooling/Heating	A/A					C/C

Indoor unit		FTXC	20B	25B	35B	50B	60B	71B
Dimensions	Unit HeightxWidthxDepth	mm	288x785x250				297x1,010x288	
Weight	Unit	kg	9.00		9.50		13.0	
Air filter	Type		Removable / washable					
Fan	Air flow rate Cooling Silent operation/Low/Medium/High	m ³ /min	5.4/6.5/9/10.8			7.4/8.2/10/12.2	10.2/13.6/16/20.4	
Sound power level	Cooling	dBA	54		55	57	60	
Sound pressure level	Cooling Silent operation/Low/High	dBA	20/26/38		21/26/39	29/33/45	30/38/46	
Control systems	Infrared remote control		BRC52B66					
	Wired remote control		-					
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240					

Outdoor unit		RXC	20B	25B	35B	50B	60B	71B
Dimensions	Unit HeightxWidthxDepth	mm	550x658x273			615x845x300		695x930x350
Weight	Unit	kg	24.0		26.0	39.0	45.0	
Sound power level	Cooling	dBA	58		60	65	66	69
Sound pressure level	Cooling High	dBA	45		46	51	54	
Operation range	Cooling Ambient	Min.-Max. °CDB	10~46				-10~46	
	Heating Ambient	Min.-Max. °CWB				-15~18		
Refrigerant	Type		R-32					
	GWP		675.0					
	Charge	kg/TCO2Eq	0.550/0.371	0.750/0.506	1.00/0.675	1.10/0.743	1.15/0.776	
Piping connections	Liquid OD	mm	64					
	Gas OD	mm	9.52			12.7		
	Piping length	OU - IU Max. System Chargeless	m	20			30	
	Additional refrigerant charge	kg/m	0,017 (for piping length exceeding 7.5m)					
	Level difference	IU - OU Max.	m	15.0			20.0	
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240					
Current - 50Hz	Maximum fuse amps (MFA)	A	16			20		

Daikin Europe N.V. · goliat.d@daikineurope.com · 0 0 · Poland · 0 0 · 0 (Responsible Editor)



ECPEN19-045

03/2019

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

